

Model MC722SG-XX

Gigabit 1000Base FIBER MEDIA CONVERTER


Installation and Operation Manual

Introduction


The MC721SG-XX auto-negotiating Fast Ethernet Media Converter set which is designed to translates 1000Base-TX copper and 1000Base-FX fast Ethernet fiber cabling. The Media Converter enables you to extend the distance of your Gigabit Ethernet network up to 40km (XX in the part number will indicate max distance).

The Converters are equipped with [1] duplex SC fiber connector transmit data over two fibers.

Six LED indicators are built in for easy monitoring and system diagnostics for power, fiber and UTP, link and activity.

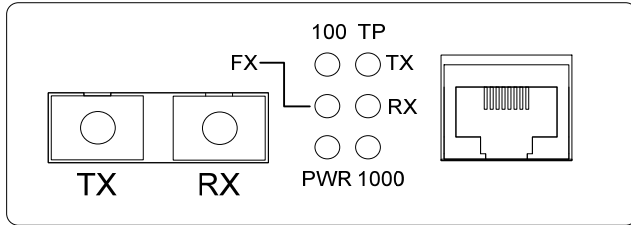

Front Panel

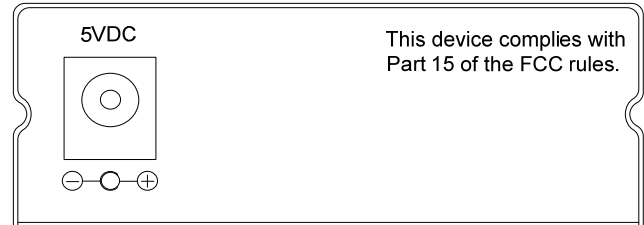

Rear Panel

LED Indicators		
LED	Color	Function
TP 100	Green	Lit when TP speed is 100Mbps
TP1000	Green	Lit when TP speed is 1000Mbps
TP TX	Green	Lit when TP data is transmitting
TP RX	Green	Lit when TP data is receiving
FX/Link Act	Green	Lit when fiber connection is made Blinks when data transfer is active
PWR	Green	Lit when 5 Volt DC power is applied

MC721SG-XX Fiber Media Converter Installation Drawing



Installing the MC722SG-XX Fiber Media Converters

Refer to the above diagram when installing. Use best industry practices and follow all local building codes.

- 1) Connect a network patch cable from the network equipment's Ethernet s to the receiver.
- 2) Connect a Single Mode fiber cable between the transmitter and the receiver using SC fiber connectors.
- 3) Connect a network patch cable from the transmitter's Ethernet jack to the remote IP device (IP camera in this example).
- 4) Connect the supplied power transformers to the transmitter and receiver.

Trouble Shooting

(Continued on Page 2)

NITEK [®]	USA	5410 Newport Drive, # 24	EUROPE	De Schans 19-21 2a
		Rolling Meadows, IL 60008		8231 KA Lelystad
		Phone: (847) 259-8900		Tel: +31(0)320-2300005
		Fax: (847) 259-1300		Fax: +31(0)320-282186
		E-mail: info@nitek.net		E-mail: info@nitek.nl
		WWW.NITEK.NET		WWW.NITEK.NL

Model MC722SG-XX

10/100 FIBER MEDIA CONVERTER

Installation and Operation Manual

Trouble Shooting

1. Is the Power LED on the media converter illuminated?

Answer—No

- Check to insure power adapter is properly connected to the media converter and the power outlet.
- Is the correct 5vold DC adapter that was supplied with the unit being used?
- Contact tech support at (800) 528-4343

2. Is the FX/ACT illuminated?

Answer—No

- Check the Fiber connection to the media converter.
- Check the SC fiber connector is clean and properly connected to the fiber cable
- Contact tech support at (800) 528-4343

3. Is the TX/ACT illuminated?

Answer—No

- Check the network connector for proper termination.
- Check to insure the network is transmitting data.
- Contact tech support at (800) 528-4343

NITEK®

USA

5410 Newport Drive, # 24
Rolling Meadows, IL 60008
Phone: (847) 259-8900
Fax: (847) 259-1300
E-mail: info@nitek.net
WWW.NITEK.NET

EUROPE

De Schans 19-21 2a
8231 KA Lelystad
Tel: +31(0)320-2300005
Fax: +31(0)320-282186
E-mail: info@nitek.nl
WWW.NITEK.NL