

Description

The **IPPWR16** is designed to provide 16 channels of surge protection for network devices. It can be used with both PoE+ and non-PoE devices. The IPPWR16 is cost-effective and ideally suited for protecting multi-input devices such as a network switch, NVR, or groups of IP cameras or servers. The IPPWR16 is rack mountable in a standard 19" rack. It installs in minutes and provides a single easy access point for grounding.

Features


- Provides 16 channels of surge protection
- Works with PoE+ and non-PoE 10/100/1000 equipment
- Gigabit PoE+ power
- Fits standard 19" rack cabinets
- Easy to install

Specifications

Size	2 RU
Connection Method	Standard RJ45 (16 In - 16 Out)
Transient Response Time	1 picosecond typ.
Peak Pulse Power Dissipation	3,000 W/pair (10/100µs)
Clamping Voltage	58v (on all lines)
Network Type	10/100/1000 PoE+ or non-PoE
Temperature	-40°C to +85°C
Shipping Weight	



IPPWR16 Front Panel

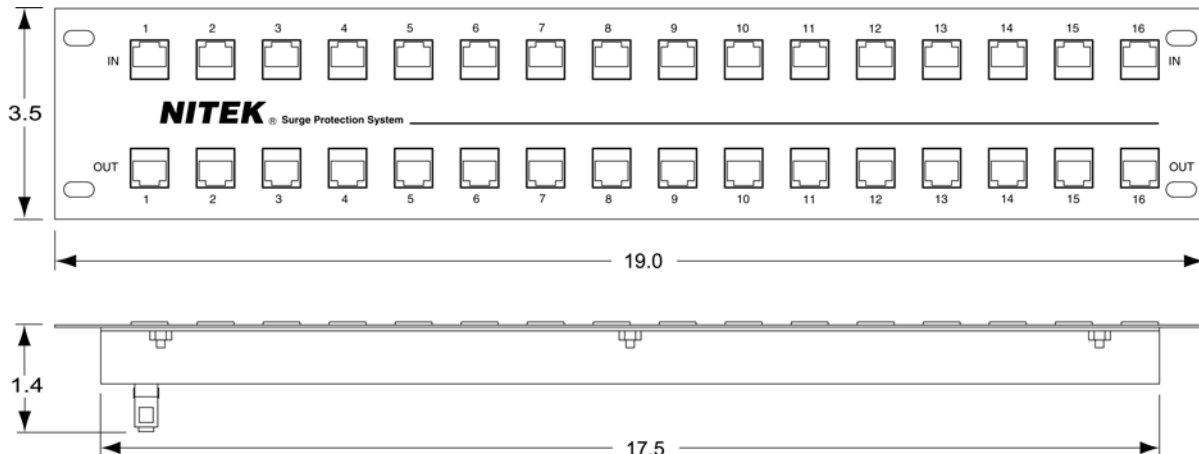

IPPWR16 Bottom View



USA

5410 Newport Drive, # 24
 Rolling Meadows, IL 60008
 Phone: (847) 259-8900
 Fax: (847) 259-1300
 E-mail: info@nitek.net
 WWW.NITEK.NET

EUROPE

De Schans 19-21 2a
 8231 KA Lelystad
 Tel: +31(0)320-230005
 Fax: +31(0)320-282186
 E-mail: info@nitek.nl
 WWW.NITEK.NL